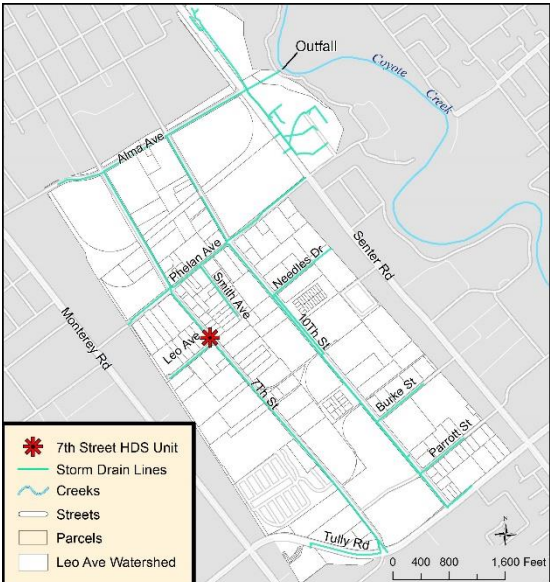
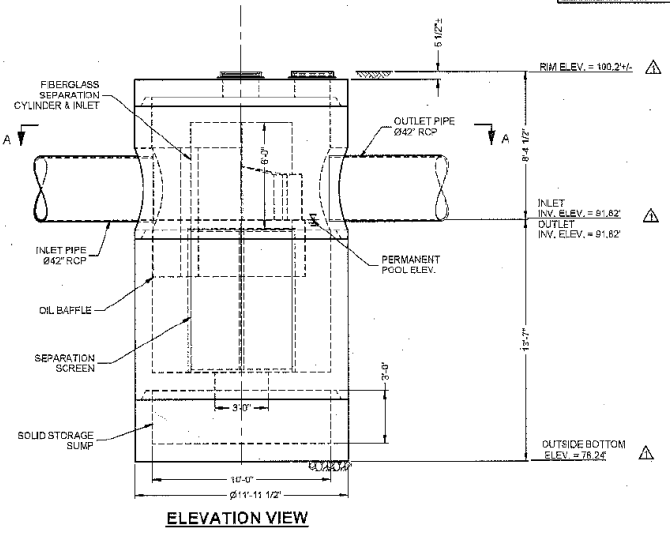



# TASK 5: URBAN RUNOFF TREATMENT RETROFITS

## HYDRONAMIC SEPARATOR UNIT STORMWATER TREATMENT RETROFIT

	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;"><b>BMP Type:</b></td> <td>Hydrodynamic Separator (HDS)</td> </tr> <tr> <td><b>Location:</b></td> <td>7<sup>th</sup> Street, just southeast of Phelan Avenue.</td> </tr> <tr> <td><b>Drainage Area:</b></td> <td>178 acres</td> </tr> <tr> <td><b>Construction Completed:</b></td> <td>October 2012</td> </tr> <tr> <td><b>Total Design and Construction Cost:</b></td> <td>\$188,473</td> </tr> </table>	<b>BMP Type:</b>	Hydrodynamic Separator (HDS)	<b>Location:</b>	7 <sup>th</sup> Street, just southeast of Phelan Avenue.	<b>Drainage Area:</b>	178 acres	<b>Construction Completed:</b>	October 2012	<b>Total Design and Construction Cost:</b>	\$188,473
<b>BMP Type:</b>	Hydrodynamic Separator (HDS)										
<b>Location:</b>	7 <sup>th</sup> Street, just southeast of Phelan Avenue.										
<b>Drainage Area:</b>	178 acres										
<b>Construction Completed:</b>	October 2012										
<b>Total Design and Construction Cost:</b>	\$188,473										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;"><b>Description:</b></td> <td>Prefabricated Conetch HDS unit called the Continuous Deflective Separator (CDS)</td> </tr> <tr> <td><b>Water Quality Flow Rate</b></td> <td>25 CFS</td> </tr> <tr> <td><b>Peak Flow</b></td> <td>58.6 CFS 10-year return period</td> </tr> <tr> <td><b>Removal efficiency</b></td> <td>80% for a particle size distribution having a mean particle size (<math>d_{50}</math>) of 125 <math>\mu\text{m}</math>.</td> </tr> </table>	<b>Description:</b>	Prefabricated Conetch HDS unit called the Continuous Deflective Separator (CDS)	<b>Water Quality Flow Rate</b>	25 CFS	<b>Peak Flow</b>	58.6 CFS 10-year return period	<b>Removal efficiency</b>	80% for a particle size distribution having a mean particle size ( $d_{50}$ ) of 125 $\mu\text{m}$ .	 <p style="text-align: center;"><b>ELEVATION VIEW</b></p>		
<b>Description:</b>	Prefabricated Conetch HDS unit called the Continuous Deflective Separator (CDS)										
<b>Water Quality Flow Rate</b>	25 CFS										
<b>Peak Flow</b>	58.6 CFS 10-year return period										
<b>Removal efficiency</b>	80% for a particle size distribution having a mean particle size ( $d_{50}$ ) of 125 $\mu\text{m}$ .										
	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;"><b>Monitoring Locations:</b></td> <td>Directly at the unit. Sediment settles into an isolated sump while floatables and neutrally buoyant pollutants are captured in the separation cylinder, until removed during maintenance.</td> </tr> <tr> <td><b>Monitored Dates:</b></td> <td>Water: 2/28/14, 3/29/14, 10/31/14, 12/2/14 Sump sediment: 8/3/13, 10/30/14</td> </tr> <tr> <td><b>Influent Sampling:</b></td> <td>Directly into water surface.</td> </tr> <tr> <td><b>Effluent Sampling:</b></td> <td>Effluent pipe.</td> </tr> </table>	<b>Monitoring Locations:</b>	Directly at the unit. Sediment settles into an isolated sump while floatables and neutrally buoyant pollutants are captured in the separation cylinder, until removed during maintenance.	<b>Monitored Dates:</b>	Water: 2/28/14, 3/29/14, 10/31/14, 12/2/14 Sump sediment: 8/3/13, 10/30/14	<b>Influent Sampling:</b>	Directly into water surface.	<b>Effluent Sampling:</b>	Effluent pipe.		
<b>Monitoring Locations:</b>	Directly at the unit. Sediment settles into an isolated sump while floatables and neutrally buoyant pollutants are captured in the separation cylinder, until removed during maintenance.										
<b>Monitored Dates:</b>	Water: 2/28/14, 3/29/14, 10/31/14, 12/2/14 Sump sediment: 8/3/13, 10/30/14										
<b>Influent Sampling:</b>	Directly into water surface.										
<b>Effluent Sampling:</b>	Effluent pipe.										